


T-joint panel is designed with integrated joint part for rapid assembly, leaving flush surface on both panel sides.

Panels are available in modular system.

See technical description below.

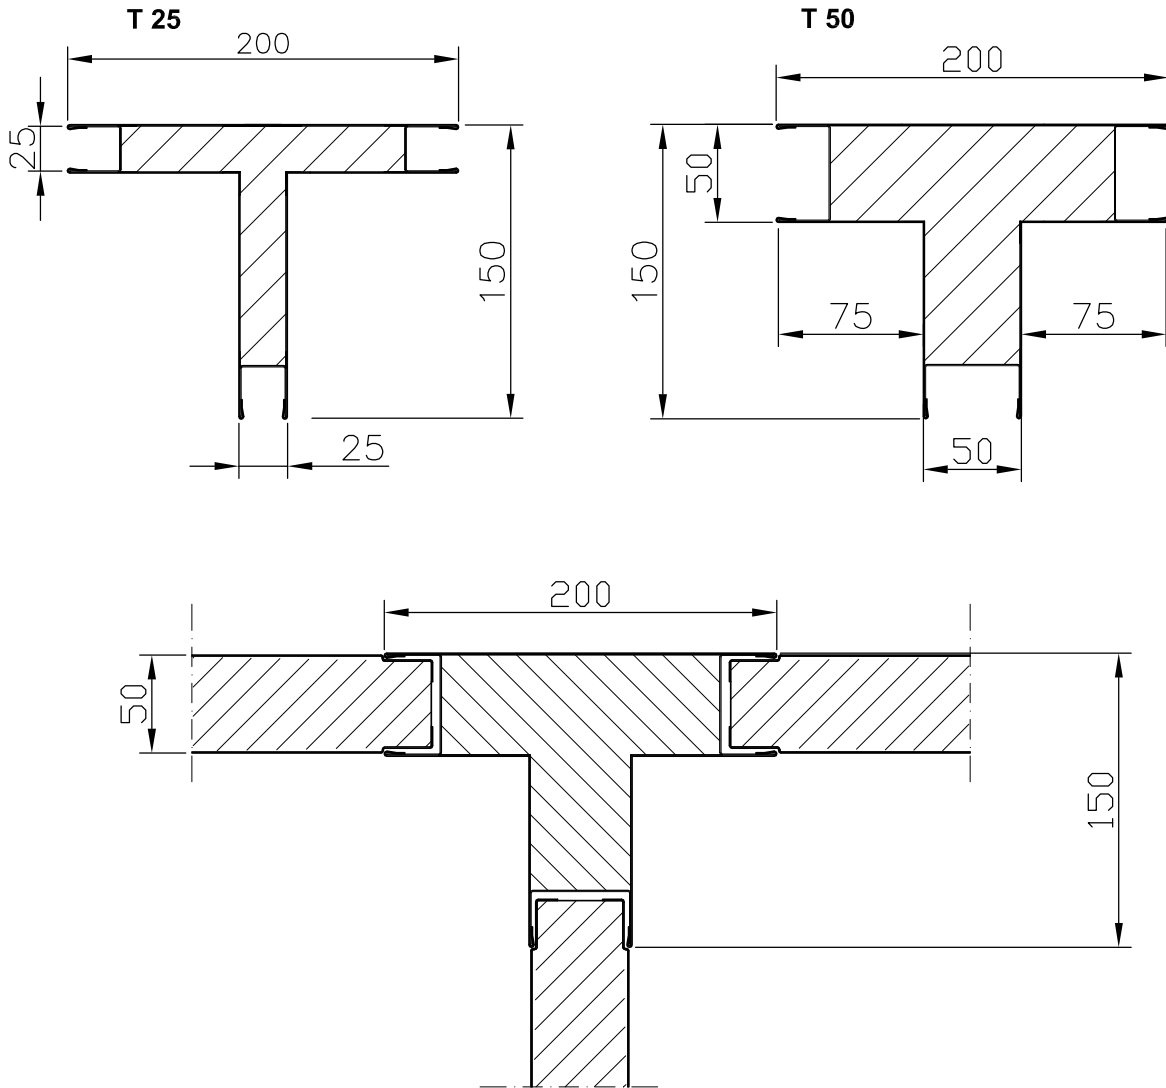

PANEL	T 25	T 50	Core material
Thickness	25 mm	50 mm	Material: mineral wool Density: 150 kg/m ³
Weight	13,8 kg/m ²	17,5 kg/m ²	
Moduls width	200/150 mm	200/150 mm	Surface material
Moduls length	up to 2500 mm	up to 2500 mm	Material: hot dipped galvanised steel sheet Coating: PVC film 150 mm ⁻³ Fire class: low flame spread surface class1
Fire class	B-15	B-15	
Sound reduction Rw	30 dB	34 dB	
Aplication	lining	partition	

Our products are produced according to our projects and documentation or customer's specification.