
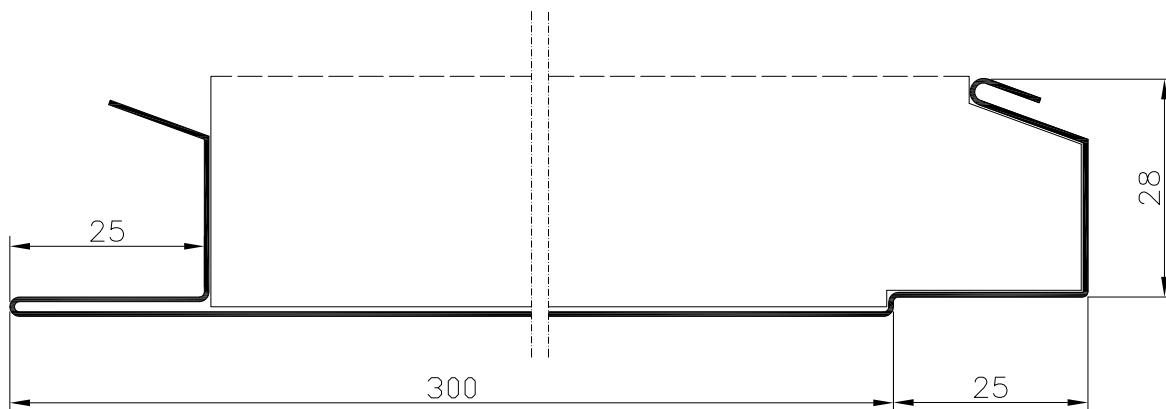
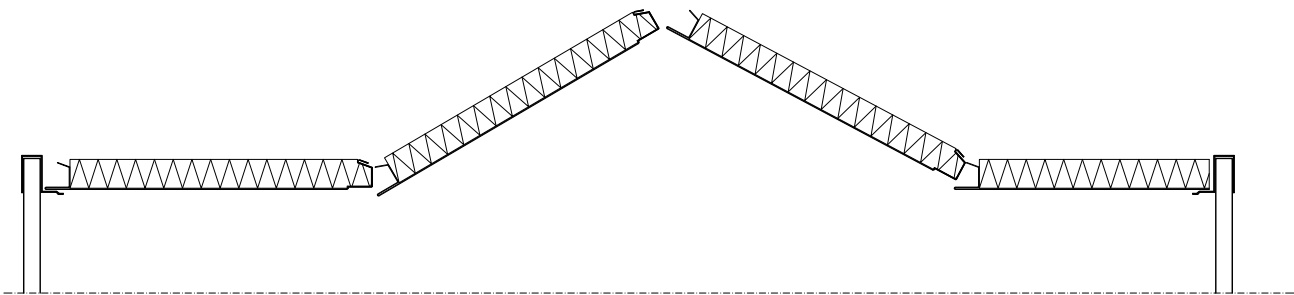
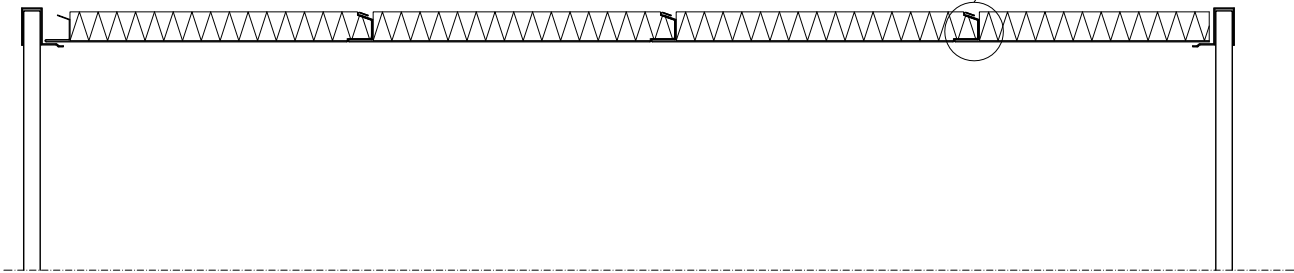


The insulation is delivered as a set with panels and no additional insulation layer is necessary for fire class B-15.  
See the technical description below.

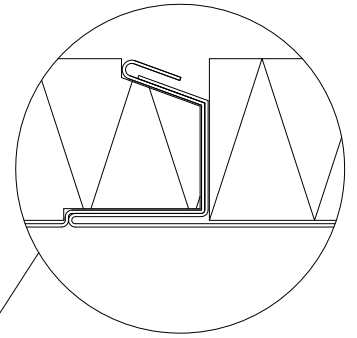

PANEL	CP 50S	Core material
Fire class	B-15/A30	Material: mineral wool
Thickness	30 mm	
Weight	9,9 kg/m <sup>2</sup>	Surface material
Module width	150-300 mm	
Module length - L	free span up to 3000 mm up to 2500 mm for SS	
Application	accommodation	Material: galvanized steel sheet, stainless steel sheet Coating: PVC film, RAL Fire class: low flame spread surface class1

Our products are produced according to our projects and documentation or customer's specification.